
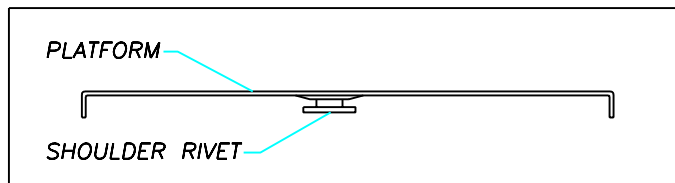


SLE2012 Series Furniture Mounts

SLE2012A

SLE2012B

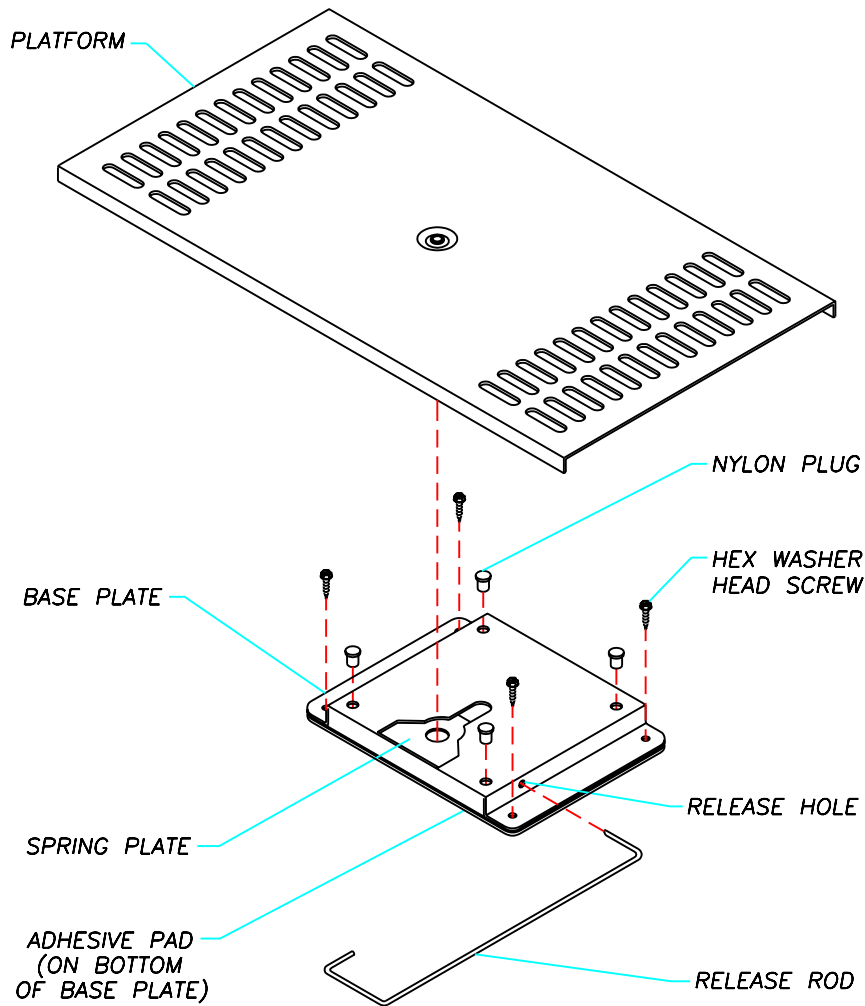

1. Insert four nylon plugs into the four holes at top corners of base plate.
2. Insert platform into base plate by positioning platform's shoulder rivet on spring plate and pushing downward and toward the rear of the base plate until spring plate returns to its upward position, locking platform into place. Pull forward on platform to verify platform is locked in place.
3. Place assembled unit on the surface to which it is to be mounted. Verify sufficient clearance for installation and platform rotation. Mark base plate location after position has been determined.
4. Remove platform from base plate by inserting release rod into release hole and turning the rod handle to left to depress spring plate. Pull forward on platform while spring plate is depressed.
5. If SLE mount is to be adhesively mounted, peel protective covering over adhesive pad on bottom of base plate. Press base plate into position.

If SLE is to be screwed to mounting surface, attach base to mounting surface with provided hex washer head screws.

6. Attach monitor to platform using fasteners appropriate to the underside of the monitor.
7. Reinsert platform into base as indicated above.

Protected under one or more of these U.S. Patent numbers: 3,291,432 3,559,942 3,724,798 DES.270,689 4,613,109 4,878,645 4,852,842 DES.309,562 4,973,023 5,169,114 5,255,884 5,310,152 5,522,576 5,621,614 Re.35,677 DES.398,834 5,826,384 5,941,492 5,964,068 6,060,661 6,102,398