


LCDW2 Dual Side by Side LCD Wall Mount

for use with ISW16 Internal Support Plate

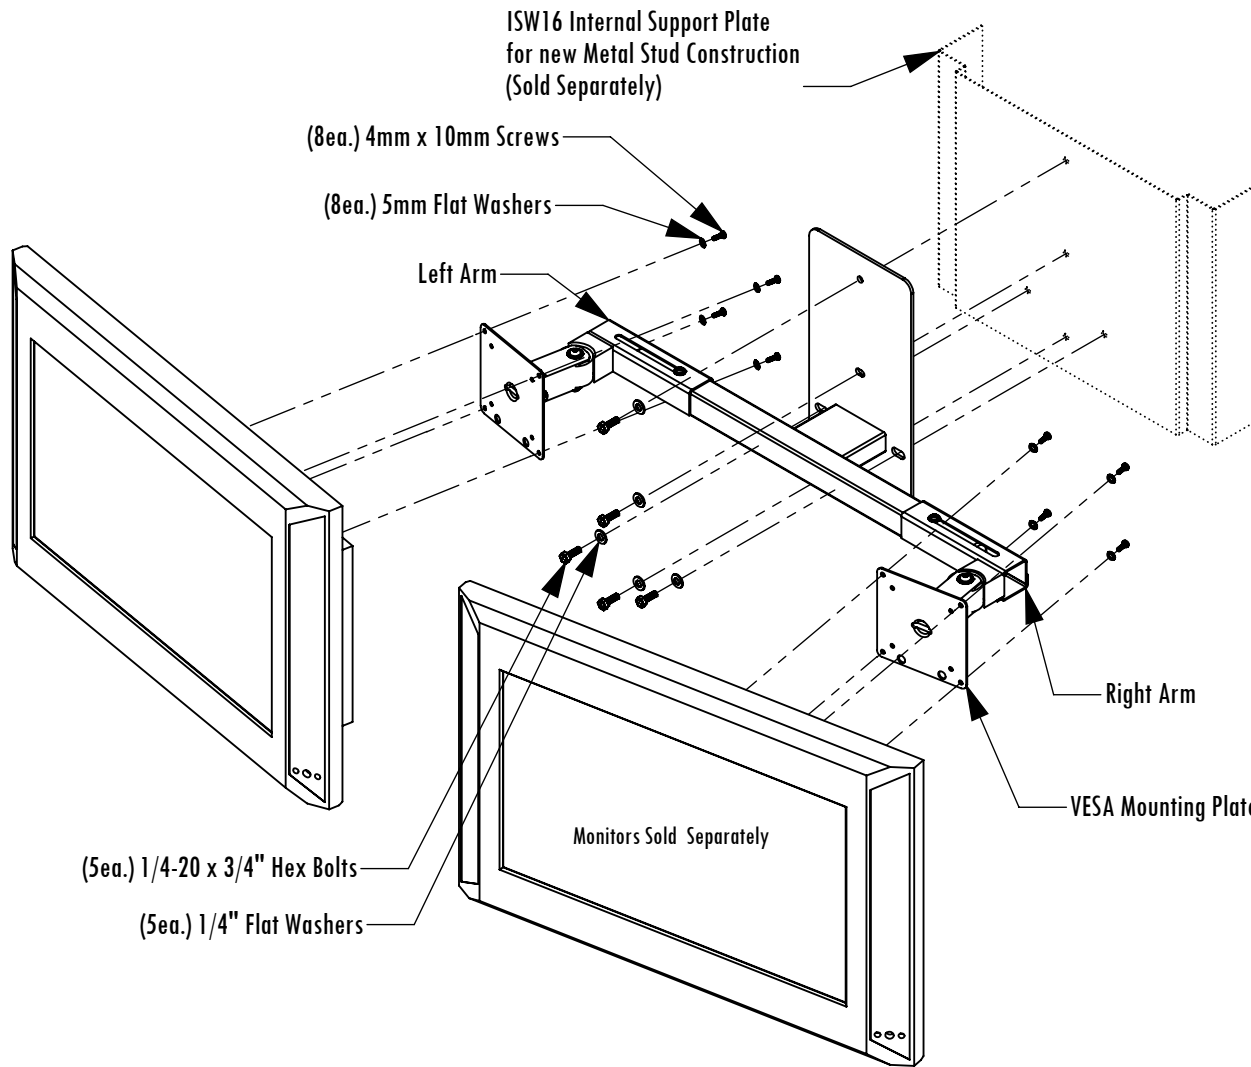

1. Attach the LCDW2 Wall Mount to the ISW16 Internal Support Plate using the provided 1/4-20 x 3/4" Hex Bolts and 1/4" Washers

2. Attach the Monitors with screws appropriate for your monitor.

M4 x 12mm x .7P (#3) are provided.

3. Adjust the tilt and pivot as needed to provide the desired viewing angle for each monitor by loosening the Nylock Nuts, adjusting and tightening the Nylock Nuts

4. Adjust the distance between the monitors by loosening the Nylock Nuts on the Left and Right Arms, sliding them into position, and retighten the Nylock Nuts.

5. Double check to make sure all hardware is secure and tight.

Hardware List

5ea. 1/4-20 x 3/4" Hex Bolts

5ea. 1/4" Flat Washers

8ea. 4mm x 12mm Screws

8ea. 5mm Fender Washers

Protected under one or more of these U.S. Patent numbers: 3,291,432; 3,559,942; 3,724,798; DES:270,689; 4,613,109; 4,878,645; 4,862,842; DES:309,624,973,023; 5,169,114; 5,265,884; 5,310,152; 5,522,576; 5,621,614; Re.35,677; DES:398,834; 5,826,384; 5,941,892; 5,964,068; 6,060,861; 6,102,398; 6,158,704; 6,454,116; 6,761,276; 6,806,425; 6,806,425